


Mounting Options:

Use the supplied #8 x 1/2" pan phillips wood screws to mount your track using one of the following options:

1 Surface Mount

Use the supplied fasteners to attach to your application.

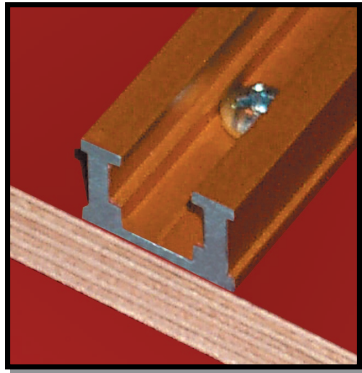

2 Flush Mount

A. Groove
Cut a groove 1/2" deep by 3/4" wide to accept the track.



B. Build-up
Use 1/2" thick material on either side of a surface-mounted track to create a flush mount.




Applications:

Attach stops, guards, jigs, fixtures and hold-downs. Use your INCRA T-track on the workbench or drill press.


Workbench

- Use T-track in your workbench top to easily locate your favorite clamping fixture.

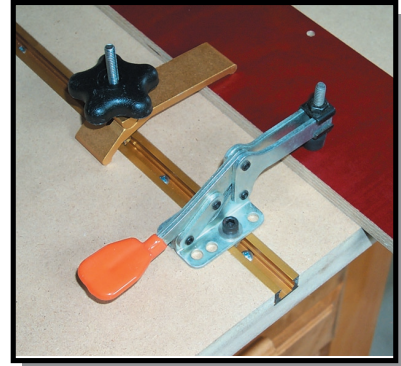


Jigs & Fixtures

- Use T-track to position a hold-down to specialty jigs and fixtures.

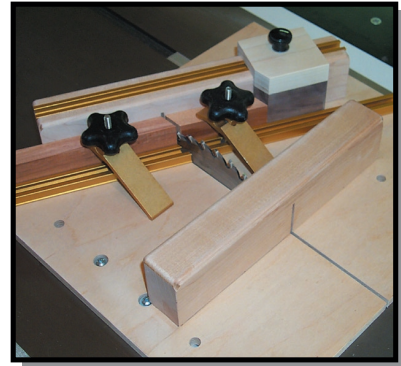

Drill Press

- T-track in your drill press table lets you position **and** lock down the fence as well as clamping fixtures. T-track in the fence locates and locks a stop positioner in place.

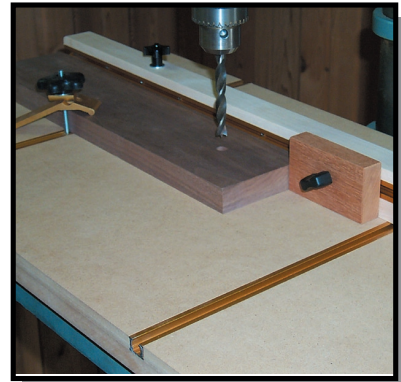

Upgrade your Miter Gauge Fence

- Front-mounted T-track lets you position a stop, while rear-mounted track lets you slide fence left or right on your miter gauge.

